

FETCO®




Cleaning Instructions for Extractor® Coffee Brewing Systems



Daily: Wipe the area above the brew basket to remove coffee and tea residue.



Weekly: The spray plate should be removed and cleaned to remove hard water deposits. This should be done in between brew cycles once the brewer has had time to cool. Warning - a small amount of water will drop after loosing the spray disc. When cleaning the spray plate, make sure that each hole is completely free of mineral deposits. A round toothpick may be used for cleaning out the holes. Never use metal objects or abrasives on the spray plate's Teflon coating.

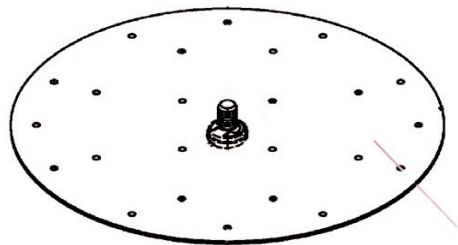

Quarterly:

- o Check water temperature, adjust if necessary.
 - o Check brew levels, adjust if necessary.
 - o Verify all settings, adjust if necessary.
 - o Inspect fittings and hoses for leaks.
 - o Inspect inside of the tank for lime deposits.
- De-lime tank and probes if necessary.