

# HOT WATER DISPENSER

## HWD 2100 Series

### HWD 2110 TOD

Temperature on Demand



Whether you need a front of house self serve solution to prepare coffee, tea, oatmeal, and instant beverages, or back of house solutions that rely on hot water, the **HWD-2110** is the answer. The newly-designed hot water dispenser meets FETCO's exacting standards of innovation, reliability, durability and quality. It delivers form, function and flexibility like no other on the market today.



**High-resolution display** provides easy navigation and instant feedback.

**Temperature settings** can be adjusted at the touch of a button using ergonomic capacitive touch function selector technology.



**Soft silicone tap** is designed to protect glass and ceramic serveware against damage.

**Convenient float indicator** is built into drip tray to help simplify maintenance and cleaning.



**SD card slot** allows operator to easily update software and maintain optimal performance.

**Four temperature settings** ensure optimal temperature instantly for a variety of beverages, soups and oatmeal.



**With TOD (Temperature on Demand)**, this streamlined unit takes the place of up to four hot water dispensers, which saves money, space, equipment and labor.

**FETCO**<sup>®</sup>  
TRUSTED | RELIABLE | QUALITY



## Water Specification

**Water Connection Inlet**  
1/4 inch male flare fitting

**Minimum Flow Rate**  
1 1/2 gpm [5.7 lpm]

**Water Pressure**  
40-75 psig [276-517 kPa]

## Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter]/Hour
DOMESTIC & CANADA <b>H211010</b>	1 x 5.0 kW	200-240	1 [50 or 60Hz]	2+G	3.6-5.1	<b>NEMA 6-30P</b>	17.4-21.0	9.5-13.5 [36.0-51.0] <sup>(2)</sup>
EXPORT & ALL OTHER <b>H211020</b>	1 x 5.0 kW	200-240	1 [50 or 60Hz]	2+G	3.6-5.1	<b>Cord only<sup>(1)</sup></b>	17.4-21.0	9.5-13.5 [36.0-51.0] <sup>(2)</sup>

(1) For export and other applications — cord without plug will be attached for appropriate electrical connection by owner.

(2) Ten gallon per hour flow rate based on 65-70°F / 18-21°C water main supply temperature at lowest possible power supply current.

Temperature ranges selectable: 158-203°F / 70-95°C based on 207°F/97°C hot water tank temperature. Temperature of dispensed hot water may vary up to 3.5% of displayed temperature selection. Four selectable hot water dispense temperatures. Selectable English and Metric temperature units.

## Measurements

**Height**  
24 1/2" [62.0 cm]


**Width**  
10" [25.4 cm]

**Depth**  
19 1/2" [49.5 cm]

**Empty Weight**  
30 lbs [13.6 kg]

**Filled Weight**  
68.3 lbs [31.0 kg]

**Shipping Weight**  
38 lbs [17.2 kg]

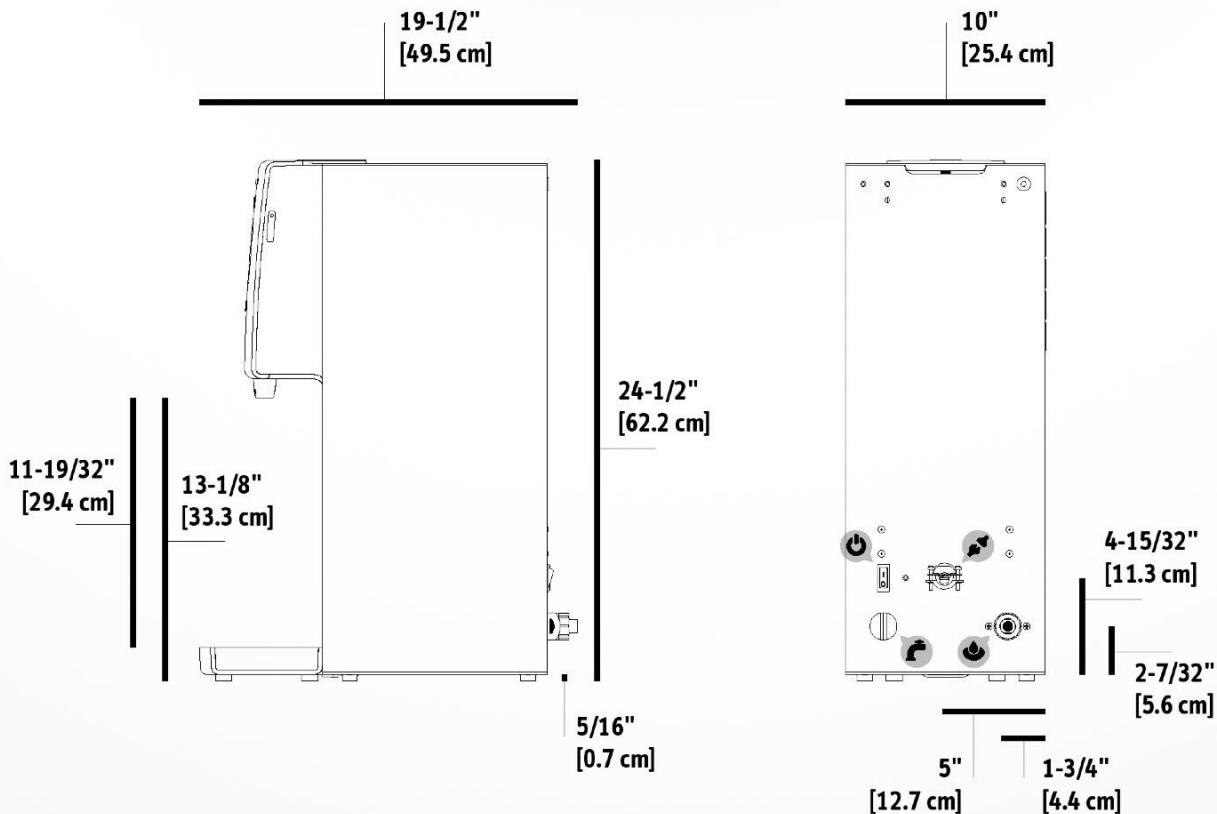

## Cups per Hour\*

8oz. **195** 12oz. **130** 16oz. **98** 20oz. **78**

\* Approximate based on maximum power setting.

## Information

[fetco.com](http://fetco.com)

[info@fetco.com](mailto:info@fetco.com)

847.719.3000  
1.800.338.2699 USA  
847.719.3001

Food Equipment Technologies Co.  
600 Rose Road  
Lake Zurich, IL 60047  
USA